

# DustDown

## ENVIRONMENTAL ROAD DUST SUPPRESSANT

### Description

DustDown is a specially formulated product designed to protect gravel road surfaces and eliminate dust. DustDown penetrates the road surface and with time forms a layer on the road surface which then needs less spraying periods. Roads treated with DustDown do not develop a slippery surface when wet.

### Applications/Functions

Dust prevention and suppression on mine roads, haul roads and gravel roads.

Increases tyre life.

Reduces vehicle maintenance.

### Advantages

- Easy to apply
- Reduces vehicle maintenance
- Increases tyre life

### Typical Properties

Appearance: light coloured liquid.

### Recommended Treatment for Gravel Roads

Initial Coating:


Mix 300 lt of DustDown into 1700 lt water.

Spray the diluted DustDown at about 0.2 lt/m<sup>2</sup>.

Leave to dry.

Maintenance Coating:

The maintenance coating is sprayed onto the dry initial coating. Maintenance coatings are applied at the same concentration and application rate as the initial coating, 1-3 weeks after the initial coating depending on the nature of the road.

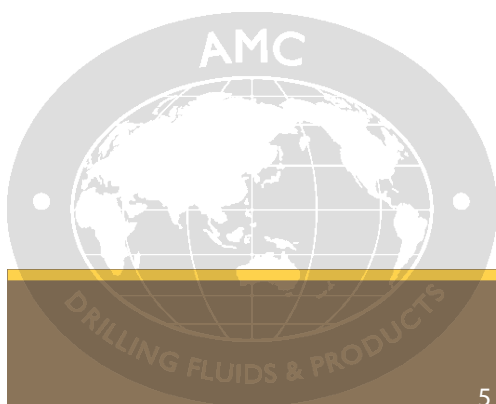

Head Office

5 Pitino Court, Osborne Park, Western Australia 6017

Tel +61 (0) 8 9445 4000 Fax: +61 (0) 8 9445 4040

amc@imdexlimited.com

www.ausmud.com

AMC has some 50 stock points within Australia and 80 throughout the world including Asia, Africa, the Americas and Europe.

an *imdex* limited company